

P OINTS

P RODUCTS CATALOGUE



RUBY

INDUSTRIAL LIFTING POINTS

2025 EDITION BY RUBYLIFTING

RUBY



LIFT WITH SAFETY
POINT WITH QUALITY

CONTENTS



SWIVEL LIFTING POINT 1



SWIVEL HOIST RING.....3



SWIVEL EYE BOLT WITH RING.....5



KEY EYE POINT 7



G80 EYE BOLT 9



G80 EYE NUT 11



G80 WELD ON HOOK 13



G80 WELD ON D RING 14




G80 WELD ON RING 14

SWIVEL LIFTING POINT

The RUBY Swivel Lifting Points are an essential item for any lifting kit.

These highly rated versatile lifting points offer exceptional performance with 360° rotation and 180° force range to ensure your loads are safe and secure.

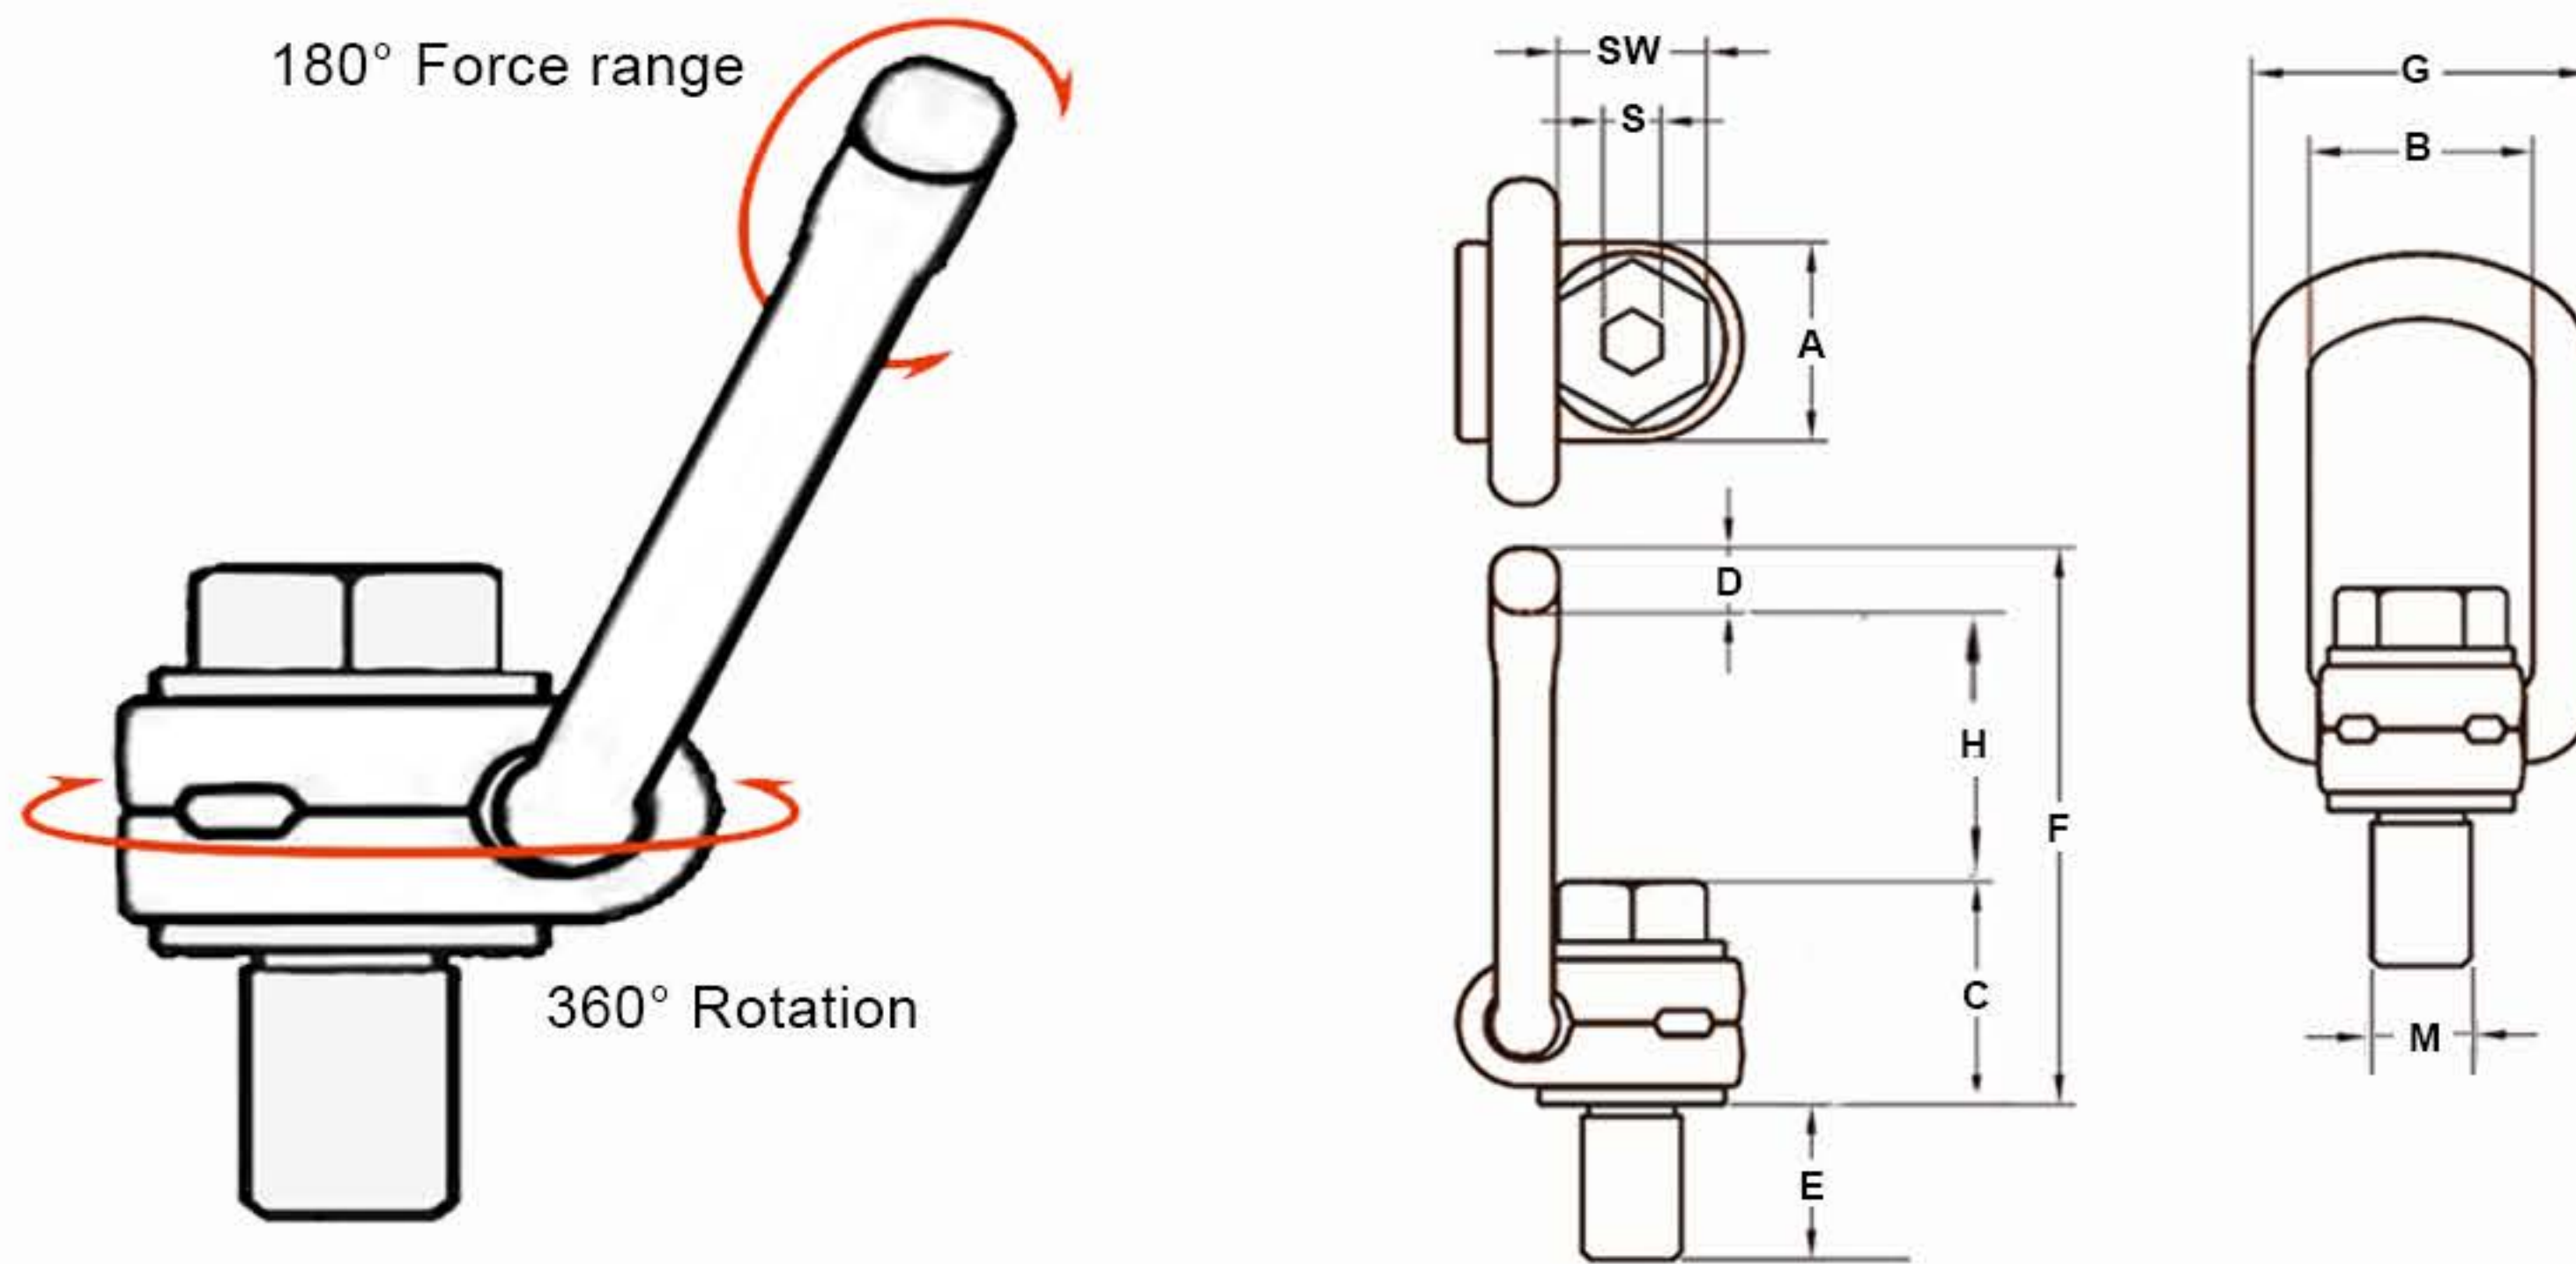

Metric Thread

PRODUCT CODE	WLL T	THREAD			DIMENSIONS									TORQUE	N.W.
		M mm	E mm	Pitch	A	B	C	D	F mm	G	H	S	SW	Nm	kg
RP001-M8	0.3	M8	11	1.25	34	37	42	14	98	57	42	6	13	40	0.5
RP001-M10	0.63	M10	16	1.5	34	37	44	14	98	57	40	6	16	40	0.5
RP001-M12	1	M12	18	1.75	34	37	45	14	98	57	39	8	18	40	0.5
RP001-M14	1.2	M14	21	2	34	37	48	14	98	57	36	10	24	100	0.5
RP001-M16	1.5	M16	24	2	34	37	48	14	98	57	36	10	24	130	0.5
RP001-M18	2	M18	26	2.5	50	54	58	16	143	82	68	12	30	170	1.5
RP001-M20	2.5	M20	30	2.5	50	54	58	16	143	82	68	12	30	170	1.5
RP001-M24	4	M24	36	3	50	54	61	16	143	82	65	14	36	280	1.5
RP001-M27	4	M27	38	3	60	65	82	22	170	99	66	17	46	500	3.0
RP001-M30	5	M30	48	3.5	60	65	82	22	170	99	66	17	46	600	3.5
RP001-M36S	7	M36	54	4	60	65	85	22	170	99	63	22	55	600	3.5
RP001-M36B	8	M36	62	4	77	85	104	27	226	123	95	22	55	600	6.0
RP001-M42S	10	M42	72	4.5	77	85	106	27	226	123	93	22	65	800	6.5
RP001-M42B	15	M42	63	4.5	95	104	117	36	257	158	104	22	65	800	11.0
RP001-M48	20	M48	72	5	95	104	120	36	257	158	101	27	75	800	12.0
RP001-M56	22	M56	84	5.5	95	104	117	36	257	158	104	27	85	900	15.0
RP001-M64	22.5	M64	100	6	114	104	138	36	266	158	92	32	95	1000	16.3

* Design Factor 4:1

S = Small size B = Big size

* Available in Long bolt and Short bolt versions with replacement bolts available


* Available on demand for choose of standard metric thread, metric fine thread, UNC, UNF thread and so on.



LOAD STYLE										
NO. OF LEGS	1	2	1	2	2	2	2	3-4	3-4	3-4
LOAD DIRECTION	0°	0°	90°	90°	0-45°	45-60°	ASYMMETRY	0-45°	45-60°	ASYMMETRY
THREAD	WLL IN TONNES									
M8	0.3	0.6	0.3	0.6	0.42	0.3	0.3	0.63	0.45	0.3
M10	0.63	1.26	0.63	1.26	0.88	0.63	0.63	1.32	0.95	0.63
M12	1	2	1	2	1.4	1	1	2.1	1.5	1
M14	1.2	2.4	1.2	2.4	1.7	1.2	1.2	2.5	1.8	1.2
M16	1.5	3	1.5	3	2.1	1.5	1.5	3.1	2.2	1.5
M18	2	4	2	4	2.8	2	2	4.2	3	2
M20	2.5	5	2.5	5	3.5	2.5	2.5	5.2	3.7	2.5
M24	4	8	4	8	5.6	4	4	8.4	6	4
M27	4	8	4	8	5.6	4	4	8.4	6	4
M30	5	10	5	10	7	5	5	10.5	7.5	5
M36S	7	14	7	14	9.8	7	7	14.7	10.5	7
M36B	8	16	8	16	11.2	8	8	16.8	12	8
M42S	10	20	10	20	14	10	10	21	15	10
M42B	15	30	15	30	21	15	15	31.5	22.5	15
M48	20	40	20	40	28	20	20	42	30	20
M56	22	44	22	44	30.8	22	22	46.2	33	22
M64	22.5	45	22.5	45	31.5	22.5	22.5	47.25	33.75	22.5

SWIVEL HOIST RING

360° rotation and 180° force range. When the direction of force changes, the ring can rotate with direction of force without twisting the lifting ring.

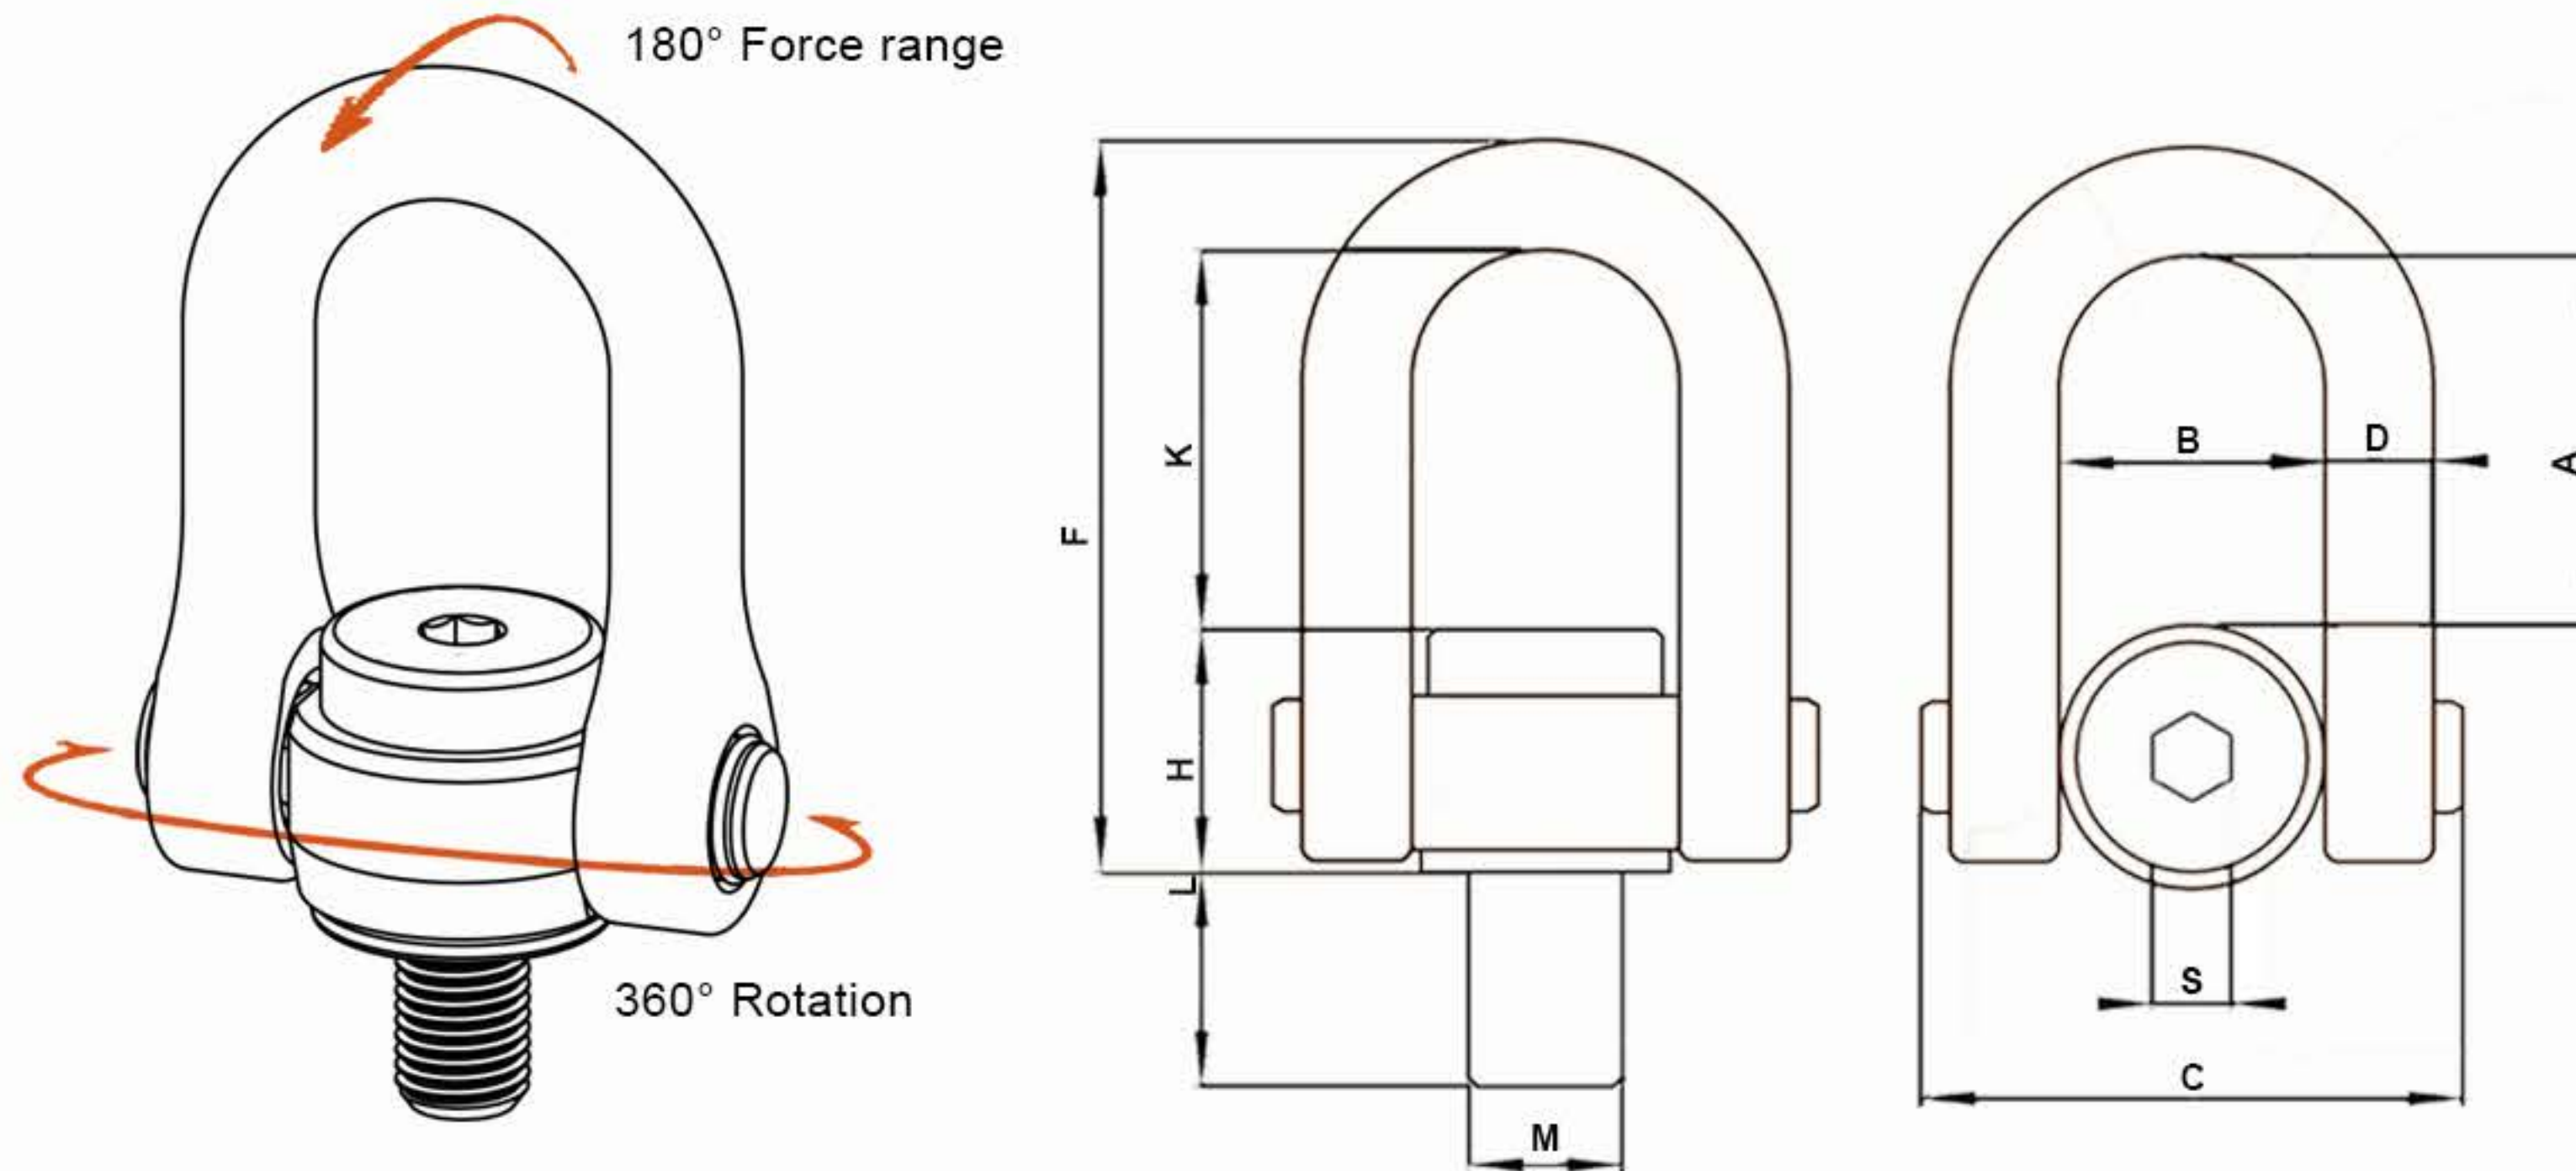

Metric Thread

PRODUCT CODE	WLL T	THREAD			DIMENSIONS								TORQUE Nm	N.W. kg
		M mm	L mm	Pitch	A	B	C	D mm	F	K	H	S		
RP002-M8	0.5	M8	12	1.25	50	37	76	14	101	49	38	8	40	0.8
RP002-M10	0.7	M10	16	1.5	50	37	76	14	101	49	38	8	40	0.8
RP002-M12	1	M12	18	1.75	50	37	76	14	101	49	38	8	40	0.8
RP002-M14	1.5	M14	21	2	50	37	76	14	101	49	38	8	100	0.8
RP002-M16	2	M16	24	2	50	37	76	14	101	49	38	8	130	0.8
RP002-M18	2.5	M18	40	2.5	74	54	105	20	145	77	48	12	170	1.9
RP002-M20	3.0	M20	40	2.5	74	54	105	20	145	77	48	12	170	2.0
RP002-M22	3.0	M22	40	2.5	74	54	105	20	145	77	48	12	170	2.1
RP002-M24	4.5	M24	40	3	74	54	105	20	145	77	48	12	280	2.5
RP002-M27	5	M27	40	3	98	73	146	30	201	103	68	17	500	5.5
RP002-M30	7.3	M30	45	3.5	98	73	146	30	201	103	68	17	600	5.5
RP002-M33	8	M33	50	3.5	98	73	146	30	201	103	68	17	600	5.5
RP002-M36	10	M36	54	4	98	73	146	30	201	103	68	17	600	5.5
RP002-M39	10	M39	58	4	98	73	146	30	201	103	68	17	800	6.0
RP002-M42	12.5	M42	63	4.5	98	73	146	30	201	103	68	17	800	6.0
RP002-M48	20	M48	68	5	120	93	182	36	249	125	84	19	800	11.5
RP002-M52	20	M52	68	5	120	93	182	36	249	125	84	19	900	12.0
RP002-M56	25	M56	78	5.5	120	93	182	36	249	125	84	19	900	12.0
RP002-M64	33	M64	100	6	185	144	280	58	395	195	136	36	1000	42.0

* Design Factor 4:1

* Available in Long bolt and Short bolt versions with replacement bolts available


* Available on demand for choose of standard metric thread, metric fine thread, UNC, UNF thread and so on.



LOAD STYLE										
NO. OF LEGS	1	2	1	2	2	2	2	3-4	3-4	3-4
LOAD DIRECTION	0°	0°	90°	90°	0-45°	45-60°	ASYMMETRY	0-45°	45-60°	ASYMMETRY
THREAD	WLL IN TONNES									
M8	0.5	1.0	0.5	1.0	0.7	0.5	0.5	1.1	0.8	0.5
M10	0.7	1.4	0.7	1.4	1.0	0.7	0.7	1.5	1.1	0.7
M12	1	2	1	2	1.4	1	1	2.1	1.5	1
M14	1.5	3	1.5	3	2.1	1.5	1.5	3.1	2.3	1.5
M16	2	4	2	4	2.8	2	2	4.2	3	2
M18	2.5	5	2.5	5	3.5	2.5	2.5	5.25	3.75	2.5
M20	3	6	3	6	4.2	3	3	6.3	4.5	3
M22	3	6	3	6	4.2	3	3	6.3	4.5	3
M24	4.5	9	4.5	9	6.3	4.5	4.5	9.4	6.8	4.5
M27	5	10	5	10	7	5	5	10.5	7.5	5
M30	7.3	14.6	7.3	14.6	10.2	7.3	7.3	15.3	11	7.3
M33	8	16	8	16	11.2	8	8	16.8	12	8
M36	10	20	10	20	14	10	10	21	15	10
M39	10	20	10	20	14	10	10	21	15	10
M42	12.5	25	12.5	25	17.5	12.5	12.5	26.3	18.8	12.5
M48	20	40	20	40	28	20	20	42	30	20
M52	20	40	20	40	28	20	20	42	30	20
M56	25	50	25	50	35	25	25	53	37.5	25
M64	33	66	33	66	46.2	33	33	69.3	49.5	33

SWIVEL EYE BOLT WITH RING

360° rotation and 230° force range, built-in ball structure, uniform force distribution, smooth rotation. When the direction of force changes, the lifting ring rotates with the direction of force without twisting.

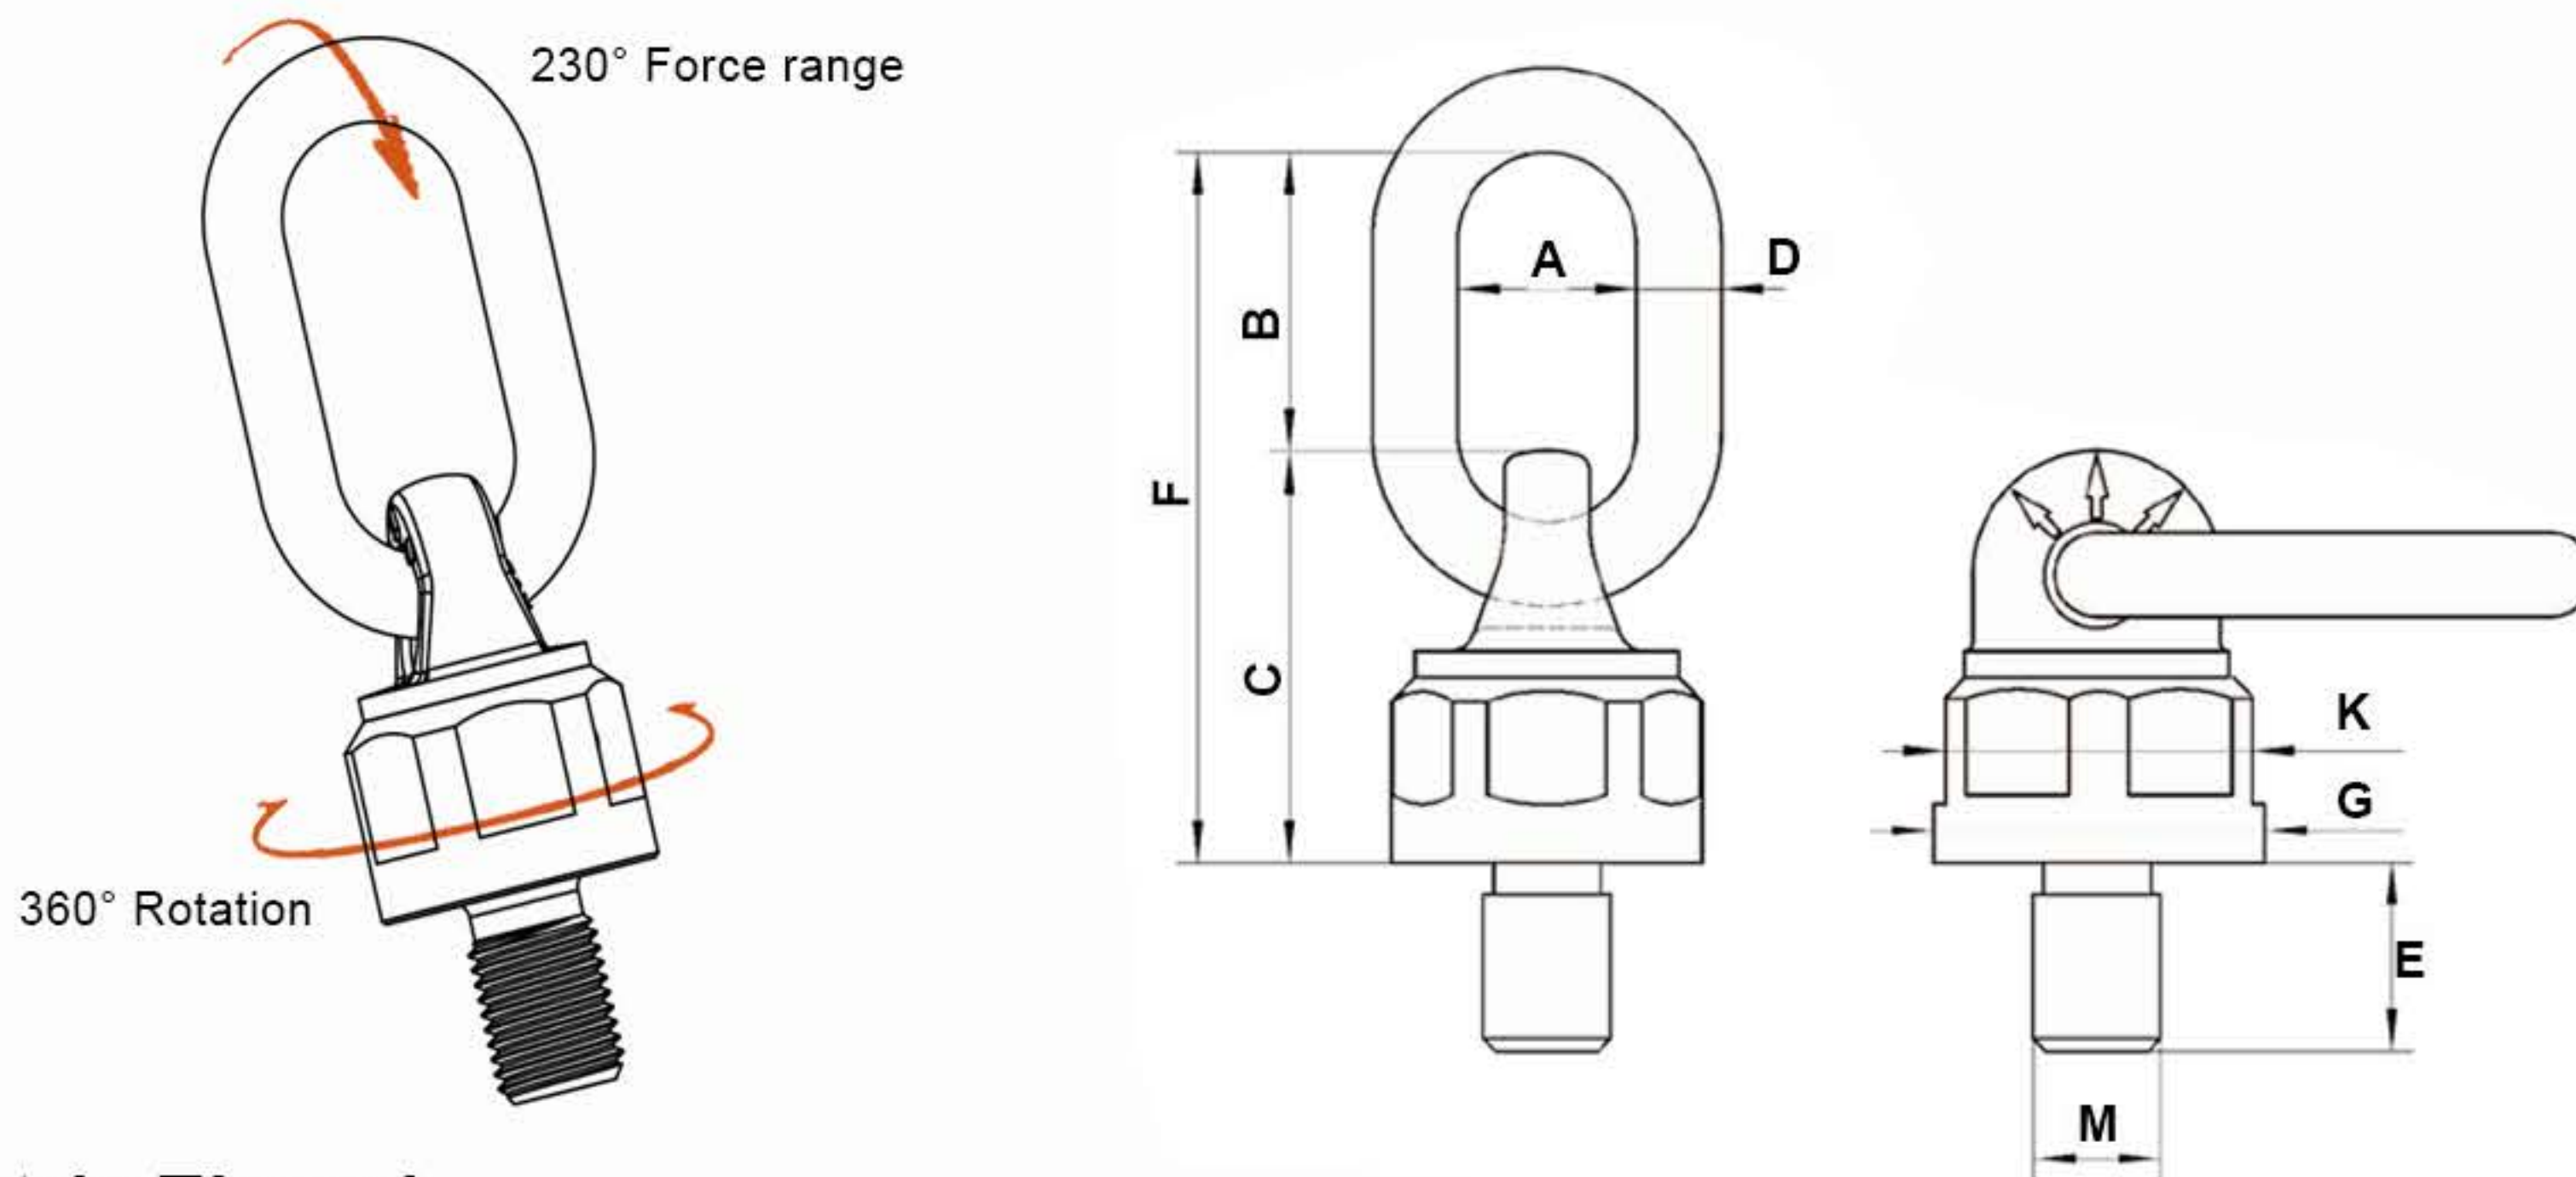

Metric Thread

PRODUCT CODE	WLL T	THREAD			DIMENSIONS							TORQUE	N.W. kg
		M mm	E mm	Pitch	A	B	C	D mm	F	G	K	Nm	
RP003-M8	0.4	M8	12	1.25	30	43.5	54	12	97.5	40	37	40	0.44
RP003-M10	0.6	M10	19	1.5	30	43.5	54	12	97.5	40	37	40	0.45
RP003-M12	0.7	M12	19	1.75	30	43.5	54	12	97.5	40	37	40	0.45
RP003-M14	1.25	M14	31.8	2	30	43.5	54	12	97.5	40	37	100	0.45
RP003-M16	1.5	M16	31.8	2	30	43.5	54	12	97.5	40	37	130	0.48
RP003-M18	1.9	M18	30	2.5	34	54.5	78	16	132.5	59	54.5	170	1.35
RP003-M20	2.0	M20	30	2.5	34	54.5	78	16	132.5	59	54.5	170	1.4
RP003-M22	2.0	M22	30	2.5	34	54.5	78	16	132.5	59	54.5	170	1.4
RP003-M24	3.15	M24	30	3	34	54.5	78	16	132.5	59	54.5	280	1.4
RP003-M27	4	M27	38.1	3	40	67	93	20	160	70	64.5	500	2.35
RP003-M30	5	M30	35	3.5	40	67	93	20	160	70	64.5	600	2.5
RP003-M33	7.5	M33	50	3.5	51	95	111	22	206	79	74	600	3.8
RP003-M36	10	M36	54	4	51	95	111	22	206	79	74	600	3.9
RP003-M39	10	M39	58	4	51	95	111	22	206	79	74	800	4.0
RP003-M42	13	M42	63	4.5	65	108	122.5	26	230.5	93	85	800	5.9
RP003-M45	13	M45	68	4.5	65	108	122.5	26	230.5	93	85	800	6.0
RP003-M48	14	M48	68	5	65	108	122.5	26	230.5	93	85	800	6.15
RP003-M56	20	M56	84	5.5	70	120	158	32	278	105	95	900	10.0

* Design Factor 4:1

* Available in Long bolt and Short bolt versions with replacement bolts available

* Available on demand for choose of standard metric thread, metric fine thread, UNC, UNF thread and so on.





Ball bearings inside

LOAD STYLE										
NO. OF LEGS	1	2	1	2	2	2	2	3-4	3-4	3-4
LOAD DIRECTION	0°	0°	90°	90°	0-45°	45-60°	ASYMMETRY	0-45°	45-60°	ASYMMETRY
THREAD	WLL IN TONNES									
M8	0.6	1.2	0.4	0.8	0.6	0.4	0.4	0.8	0.6	0.4
M10	0.9	1.8	0.6	1.2	0.8	0.6	0.6	1.3	0.9	0.6
M12	1.2	2.4	0.7	1.4	1	0.7	0.7	1.5	1.1	0.7
M14	2	4	1.25	2.5	1.8	1.3	1.3	2.6	1.9	1.3
M16	2.6	5.2	1.5	3	2.1	1.5	1.5	3.2	2.3	1.5
M18	3	6	1.9	3.8	2.7	1.9	1.9	4	2.9	1.9
M20	3.5	7	2	4	2.8	2	2	4.2	3	2
M22	3.5	7	2	4	2.8	2	2	4.2	3	2
M24	5	10	3.15	6.3	4.4	3.2	3.2	6.6	4.7	3.2
M27	7	14	4	8	5.6	4	4	8.4	6	4
M30	7	14	5	10	7	5	5	10.5	7.5	5
M33	15	30	7.5	15	10.5	7.5	7.5	15.8	11.3	7.5
M36	15	30	10	20	14	10	10	21	15	10
M39	15	30	10	20	14	10	10	21	15	10
M42	17	34	13	26	18.2	13	13	27.3	19.5	13
M45	17	34	13	26	18.2	13	13	27.3	19.5	13
M48	18	36	14	28	19.6	14	14	29.4	21	14
M56	28	56	20	40	28	20	20	42	30	20

KEY EYE POINT

The Key eye point with swivel eye redefines the capabilities of traditional lifting points. Engineered for demanding industrial environments that require reliability and efficiency, the Key eye point has a dynamic 360° rotation feature and an impressive 4.5 times increase in Working Load Limit (WLL) compared to conventional DIN580 lifting points. Its design incorporates a robust forged swivel eye, complemented by a bolt and washer assembly, which ensures secure and versatile lifting operations. The bolt features a hex socket cap grip for easy installation, allowing for swift mounting with standard tools. It includes a supplementary 'quick key' for manual tightening during temporary setups.

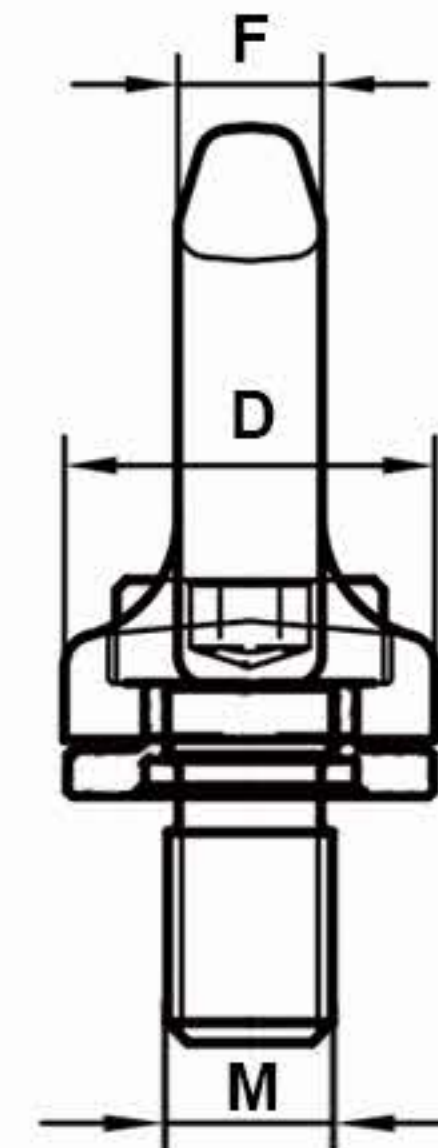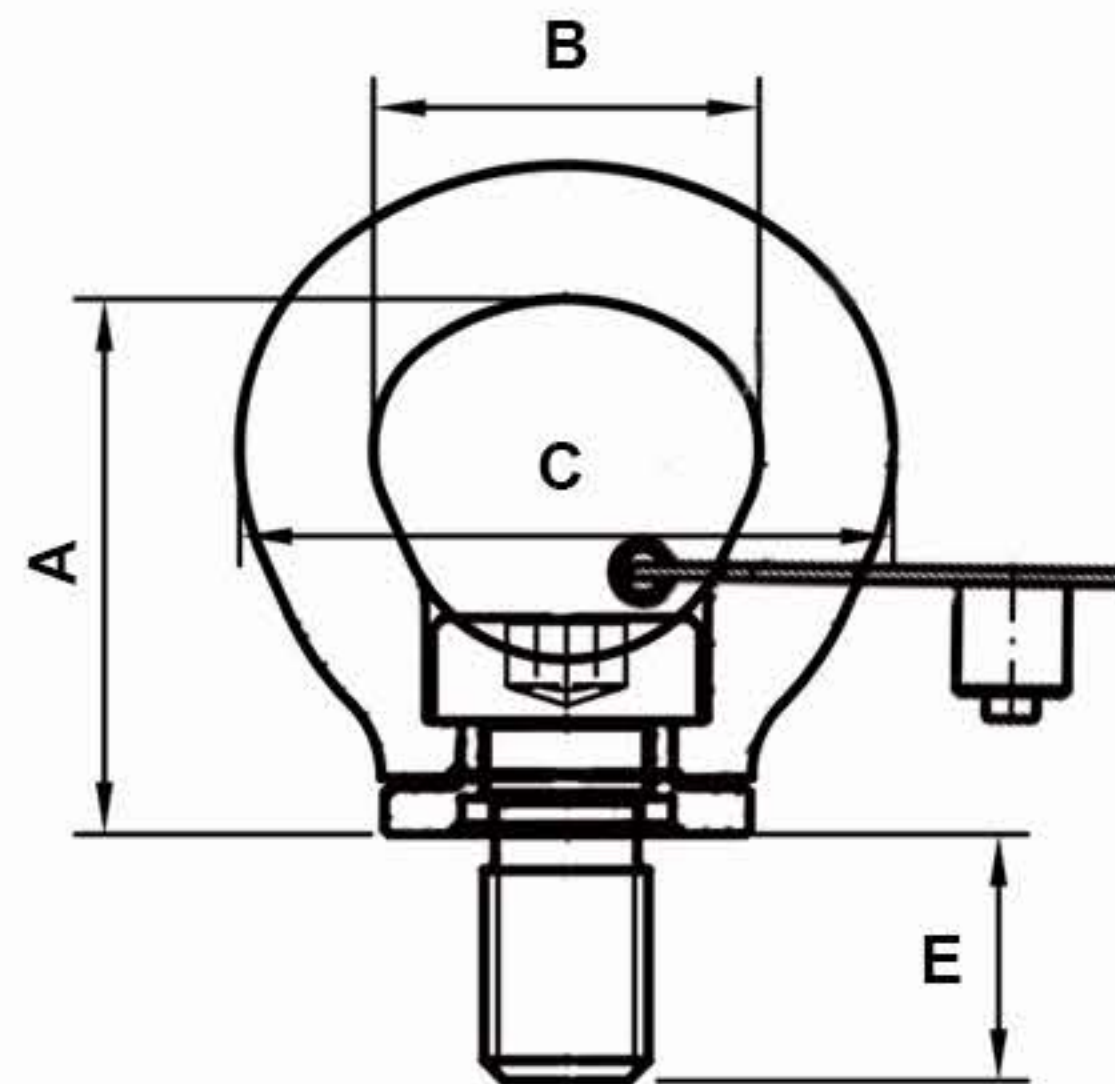

Metric Thread

PRODUCT CODE	WLL T	THREAD			DIMENSIONS					TORQUE Nm	N.W. kg
		M mm	E mm	Pitch	A	B	C mm	D	F		
RP004-M8	0.3	M8	11.5	1.25	38	26	45.3	25	8	10	0.11
RP004-M10	0.4	M10	14	1.5	38	26	45.3	25	8	10	0.12
RP004-M12	0.75	M12	17	1.75	43.5	32	54	33	10	15	0.2
RP004-M16	1.5	M16	24	2	52	37.5	63.5	36	14	30	0.35
RP004-M20	2.3	M20	30	2.5	63	44.5	78.5	47.5	20	70	0.66
RP004-M24	3.2	M24	35.3	3	74	51.5	92	53	20	150	1.1
RP004-M30	4.5	M30	45	3.5	92	65	118	68	24	250	2.07
RP004-M36	7	M36	56.8	4	105	76	136	82	30	400	4
RP004-M42	9	M42	66.5	4.5	121.5	88	160	92	35	550	5.52
RP004-M48	12	M48	75.5	5	138	100	180	110	42	550	8.86

* Design Factor 4:1




LOAD STYLE										
NO. OF LEGS	1	2	1	2	2	2	2	3-4	3-4	3-4
LOAD DIRECTION	0°	0°	90°	90°	0-45°	45-60°	ASYMMETRY	0-45°	45-60°	ASYMMETRY
THREAD	WLL IN TONNES									
M8	1	2	0.3	0.6	0.42	0.3	0.3	0.63	0.45	0.3
M10	1	2	0.4	0.8	0.56	0.4	0.4	0.8	0.6	0.4
M12	2	4	0.75	1.5	1	0.75	0.75	1.5	1.1	0.75
M16	4	8	1.5	3	2.1	1.5	1.5	3.1	2.2	1.5
M20	6	12	2.3	4.6	3.2	2.3	2.3	4.8	3.4	2.3
M24	8	16	3.2	6.4	4.5	3.2	3.2	6.7	4.8	3.2
M30	12	24	4.5	9	6.3	4.5	4.5	9.4	6.7	4.5
M36	16	32	7	14	9.8	7	7	14.7	10.5	7
M42	24	48	9	18	12.6	9	9	18.9	13.5	9
M48	32	64	12	24	16.8	12	12	25	18	12

G80 EYE BOLT

G80 Eye Bolts can be used as a lifting point and termination for chain, wire rope and other assemblies where required.

Crafted in a DIN 580 shape, this versatile and durable eye bolt is perfect for securing chains or wire ropes to fixed surfaces, offering you an unrivalled level of reliability and efficiency.

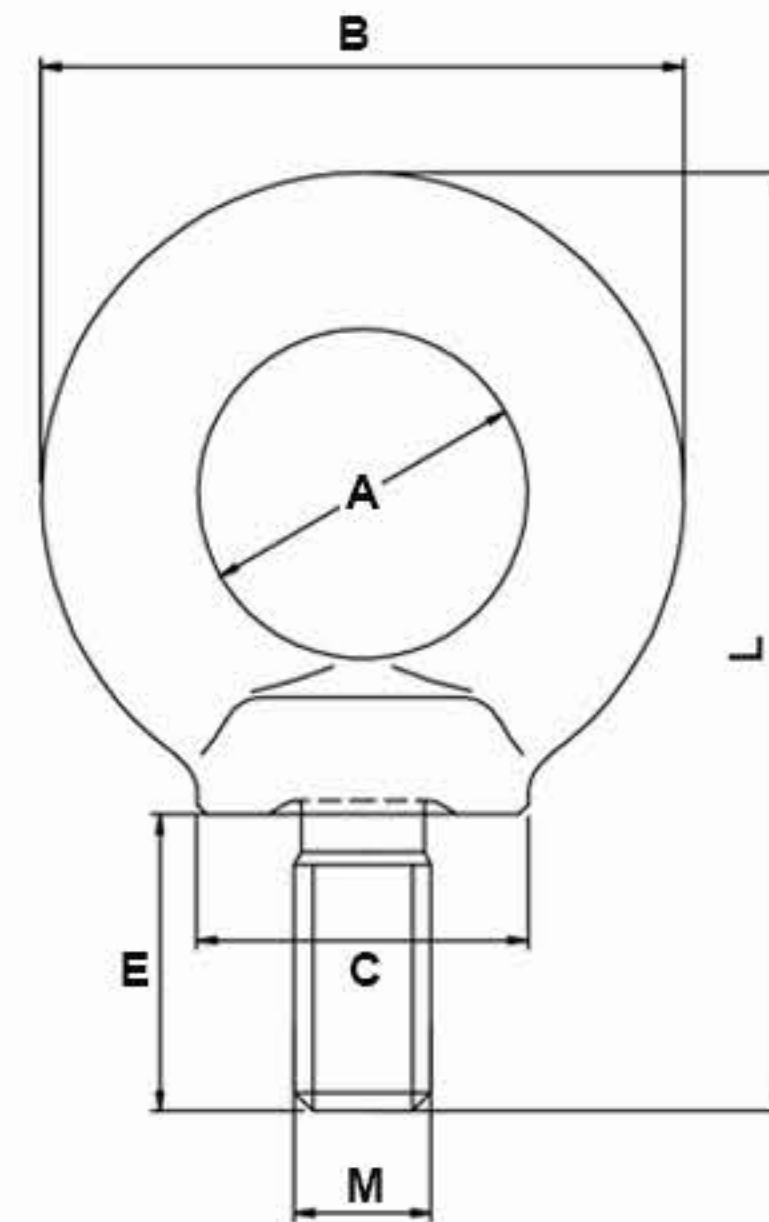

Metric Thread

PRODUCT CODE	WLL (T)		DIMENSIONS					N.W. kg
	0°	90°	E	A	B mm	C	L	
RP005-M6	0.4	0.15	13	16	28	17	42	0.05
RP005-M8	0.8	0.4	15	20	36	20	51	0.06
RP005-M10	1	0.4	18	25	45	25	63	0.11
RP005-M12	2	0.75	22	30	54	30	75	0.18
RP005-M14	3	1	28	35	63	35	91	0.28
RP005-M16	4	1.5	28	35	63	35	91	0.29
RP005-M18	5	2	30	40	72	40	101	0.42
RP005-M20	6	2.3	30	40	72	40	101	0.45
RP005-M22	7	2.8	34	45	81	45	115	0.67
RP005-M24	8	3.2	38	50	90	50	128	0.87
RP005-M27	10	4	38	60	90	50	128	0.88
RP005-M30	12	4.5	45	60	108	60	154	1.66
RP005-M33	14	5	45	60	108	60	154	1.72
RP005-M36	16	7	55	70	126	70	183	2.65
RP005-M39	20	8	55	70	126	70	183	2.80
RP005-M42	24	9	65	80	144	85	212	4.03
RP005-M45	28	10	65	80	144	85	212	4.25
RP005-M48	32	12	70	90	166	100	238	6.38
RP005-M52	36	13.5	70	90	166	100	238	6.60
RP005-M56	40	15	80	100	184	110	267	8.80
RP005-M64	50	17	90	110	206	120	293	12.40

* Design Factor 4:1




LOAD STYLE										
NO. OF LEGS	1	2	1	2	2	2	2	3-4	3-4	3-4
LOAD DIRECTION	0°	0°	90°	90°	0-45°	45-60°	ASYMMETRY	0-45°	45-60°	ASYMMETRY
THREAD	WLL IN TONNES									
M6	0.4	0.8	0.15	0.3	0.21	0.15	0.15	0.31	0.22	0.15
M8	0.8	1.6	0.4	0.8	0.56	0.4	0.4	0.84	0.6	0.4
M10	1	2	0.4	0.8	0.56	0.4	0.4	0.84	0.6	0.4
M12	2	4	0.75	1.5	1.05	0.75	0.75	1.57	1.12	0.75
M14	3	6	1	2	1.4	1	1	2.1	1.5	1
M16	4	8	1.5	3	2.1	1.5	1.5	3.15	2.25	1.5
M18	5	10	2	4	2.8	2	2	4.2	3	2
M20	6	12	2.3	4.6	3.22	2.3	2.3	4.83	3.45	2.3
M22	7	14	2.8	5.6	3.92	2.8	2.8	5.88	4.2	2.8
M24	8	16	3.2	6.4	4.48	3.2	3.2	6.72	4.8	3.2
M27	10	20	4	8	5.6	4	4	8.4	6	4
M30	12	24	4.5	9	6.3	4.5	4.5	9.45	6.75	4.5
M33	14	28	5	10	7	5	5	10.5	7.5	5
M36	16	32	7	14	9.8	7	7	14.7	10.5	7
M39	20	40	8	16	11.2	8	8	16.8	12	8
M42	24	48	9	18	12.6	9	9	18.9	13.5	9
M45	28	56	10	20	14	10	10	21	15	10
M48	32	64	12	24	16.8	12	12	25.2	18	12
M52	36	72	13.5	27	18.9	13.5	13.5	28.35	20.25	13.5
M56	40	80	15	30	21	15	15	31.5	22.5	15
M64	50	100	17	34	23.8	17	17	35.7	25.5	17

G80 EYE NUT

G80 Eye Nuts can be used as a lifting point and termination for chain, wire rope and other assemblies where required.

Crafted in a DIN 582 shape, this versatile and durable eye bolt is perfect for securing chains or wire ropes to fixed surfaces, offering you an unrivalled level of reliability and efficiency.

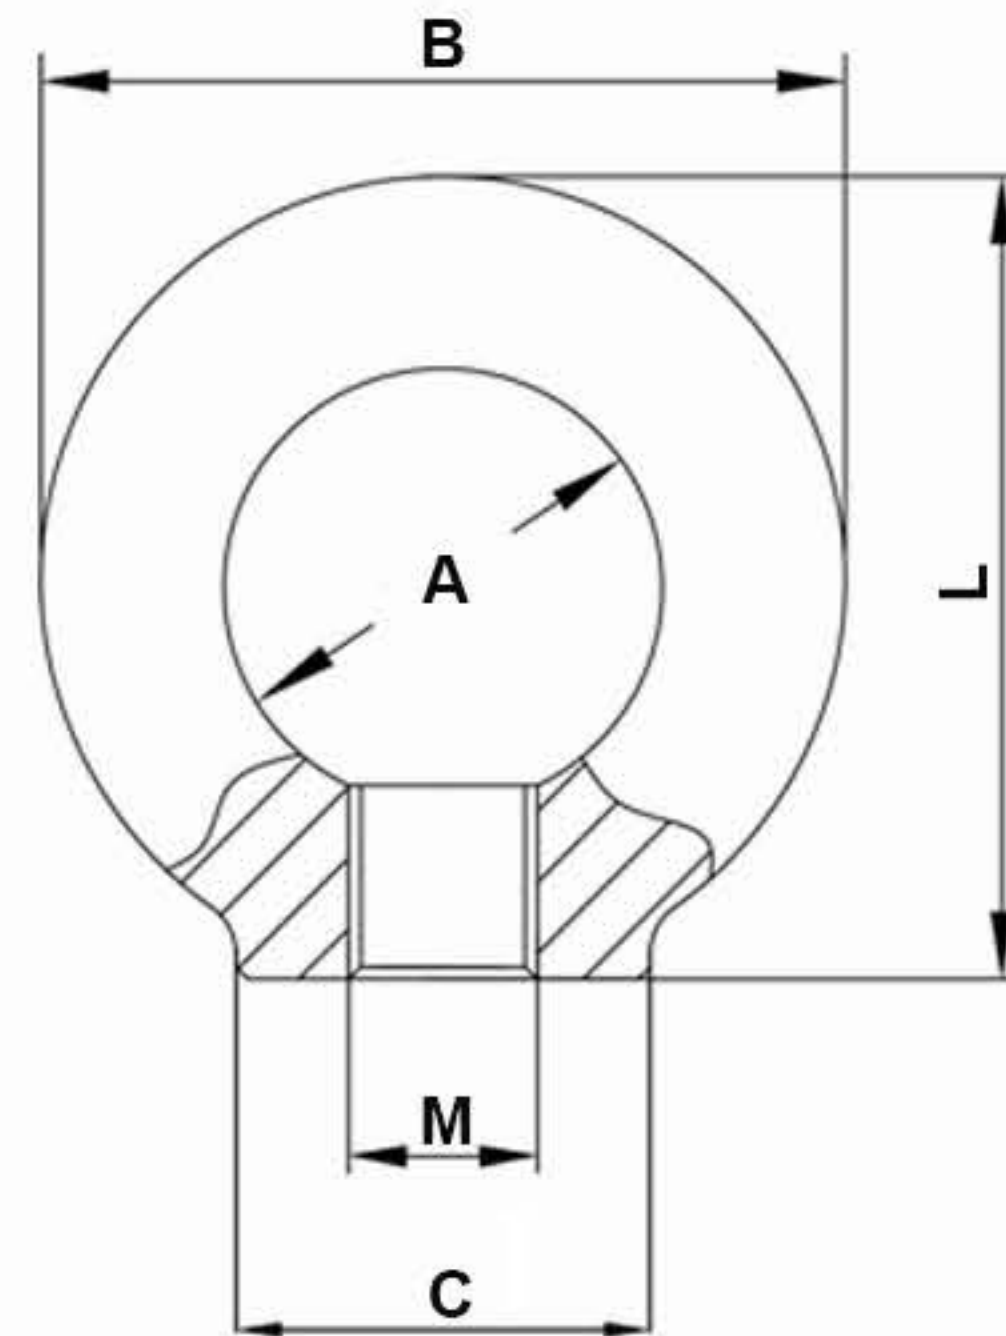




Metric Thread

PRODUCT CODE	WLL (T)		DIMENSIONS				N.W. kg
	0°	90°	A	B mm	C	L	
RP006-M6	0.4	0.15	20	36	20	36	0.05
RP006-M8	0.8	0.4	20	36	20	36	0.05
RP006-M10	1	0.4	25	45	25	45	0.09
RP006-M12	2	0.75	30	54	30	53	0.16
RP006-M14	3	1	35	63	35	62	0.24
RP006-M16	4	1.5	35	63	35	62	0.24
RP006-M18	5	2	40	72	40	71	0.34
RP006-M20	6	2.3	40	72	40	71	0.36
RP006-M22	7	2.8	45	81	45	81	0.58
RP006-M24	8	3.2	50	90	50	90	0.72
RP006-M27	10	4	50	90	50	90	0.72
RP006-M30	12	4.5	60	108	65	109	1.32
RP006-M33	14	5	60	108	65	109	1.29
RP006-M36	16	7	70	126	75	128	2.10
RP006-M39	20	8	70	126	75	128	2.09
RP006-M42	24	9	80	144	85	147	3.11
RP006-M45	28	10	80	144	85	147	3.05
RP006-M48	32	12	90	166	100	168	5.02
RP006-M52	36	13.5	90	166	100	168	4.94
RP006-M56	40	15	100	184	110	187	6.69
RP006-M64	50	17	110	206	120	208	9.30

* Design Factor 4:1




LOAD STYLE										
NO. OF LEGS	1	2	1	2	2	2	2	3-4	3-4	3-4
LOAD DIRECTION	0°	0°	90°	90°	0-45°	45-60°	ASYMMETRY	0-45°	45-60°	ASYMMETRY
THREAD	WLL IN TONNES									
M6	0.4	0.8	0.15	0.3	0.21	0.15	0.15	0.31	0.22	0.15
M8	0.8	1.6	0.4	0.8	0.56	0.4	0.4	0.84	0.6	0.4
M10	1	2	0.4	0.8	0.56	0.4	0.4	0.84	0.6	0.4
M12	2	4	0.75	1.5	1.05	0.75	0.75	1.57	1.12	0.75
M14	3	6	1	2	1.4	1	1	2.1	1.5	1
M16	4	8	1.5	3	2.1	1.5	1.5	3.15	2.25	1.5
M18	5	10	2	4	2.8	2	2	4.2	3	2
M20	6	12	2.3	4.6	3.22	2.3	2.3	4.83	3.45	2.3
M22	7	14	2.8	5.6	3.92	2.8	2.8	5.88	4.2	2.8
M24	8	16	3.2	6.4	4.48	3.2	3.2	6.72	4.8	3.2
M27	10	20	4	8	5.6	4	4	8.4	6	4
M30	12	24	4.5	9	6.3	4.5	4.5	9.45	6.75	4.5
M33	14	28	5	10	7	5	5	10.5	7.5	5
M36	16	32	7	14	9.8	7	7	14.7	10.5	7
M39	20	40	8	16	11.2	8	8	16.8	12	8
M42	24	48	9	18	12.6	9	9	18.9	13.5	9
M45	28	56	10	20	14	10	10	21	15	10
M48	32	64	12	24	16.8	12	12	25.2	18	12
M52	36	72	13.5	27	18.9	13.5	13.5	28.35	20.25	13.5
M56	40	80	15	30	21	15	15	31.5	22.5	15
M64	50	100	17	34	23.8	17	17	35.7	25.5	17

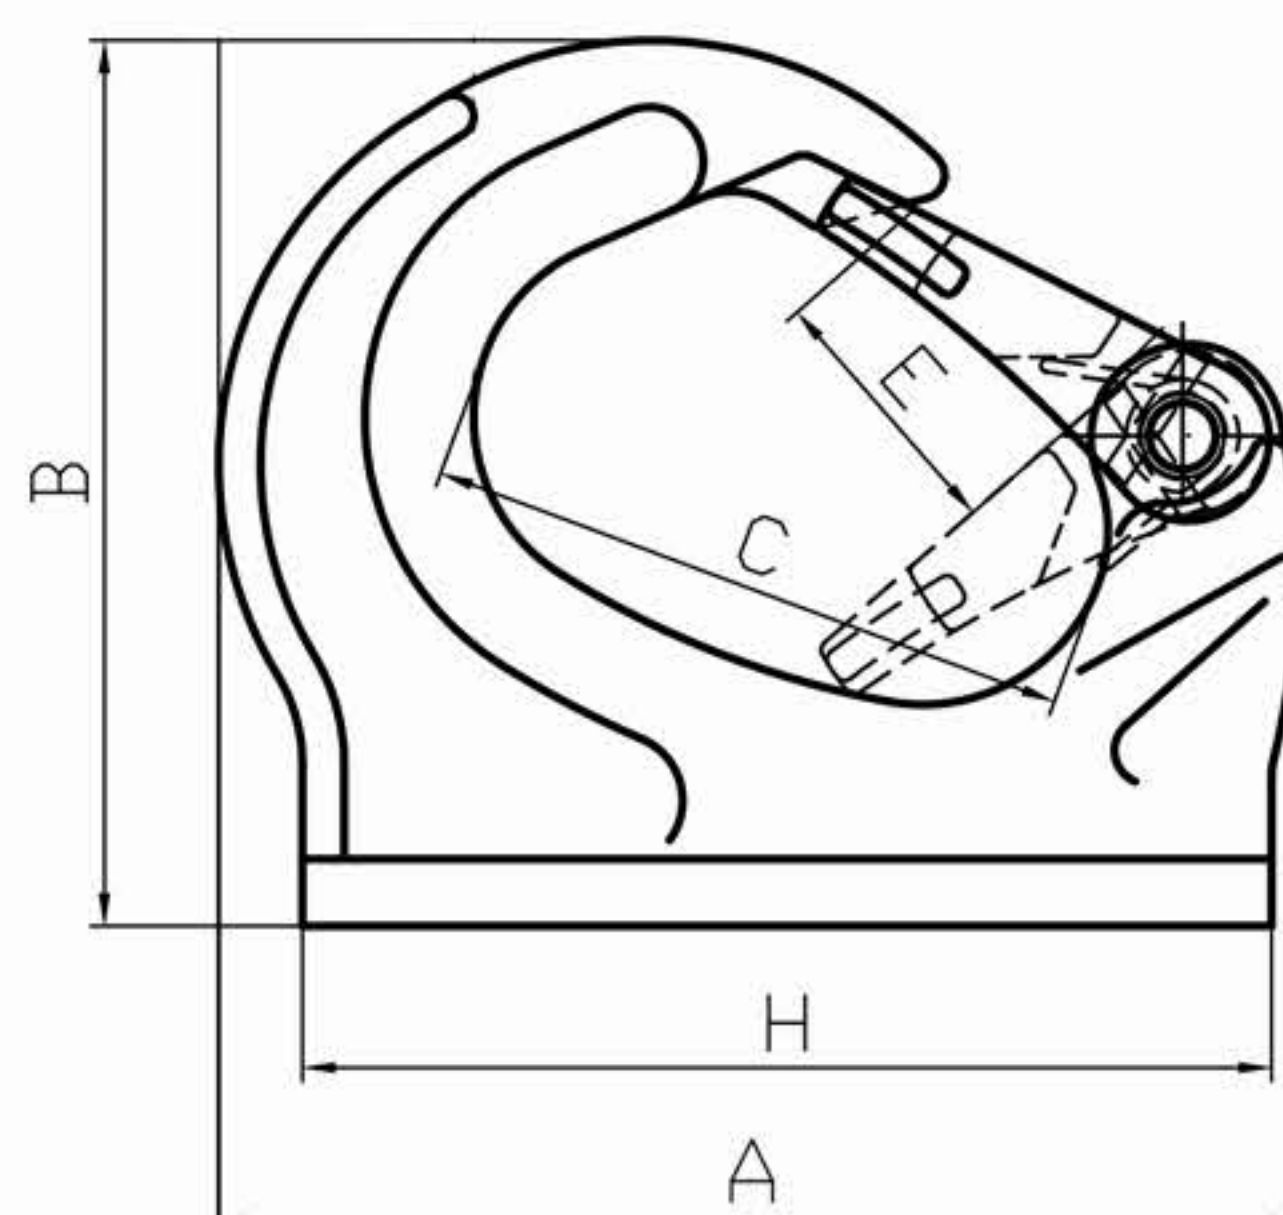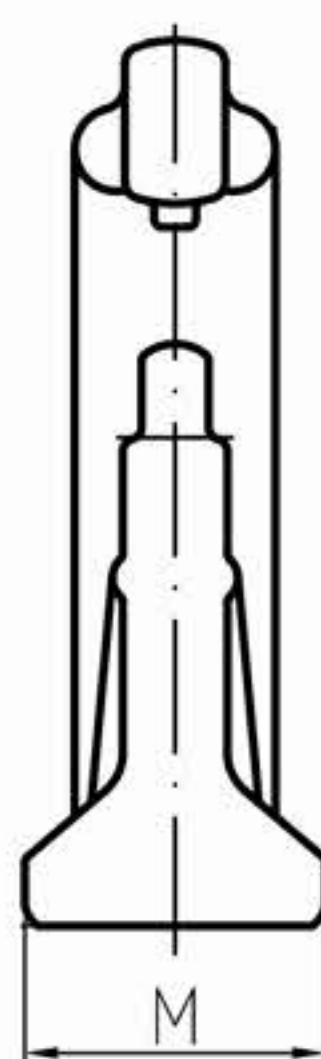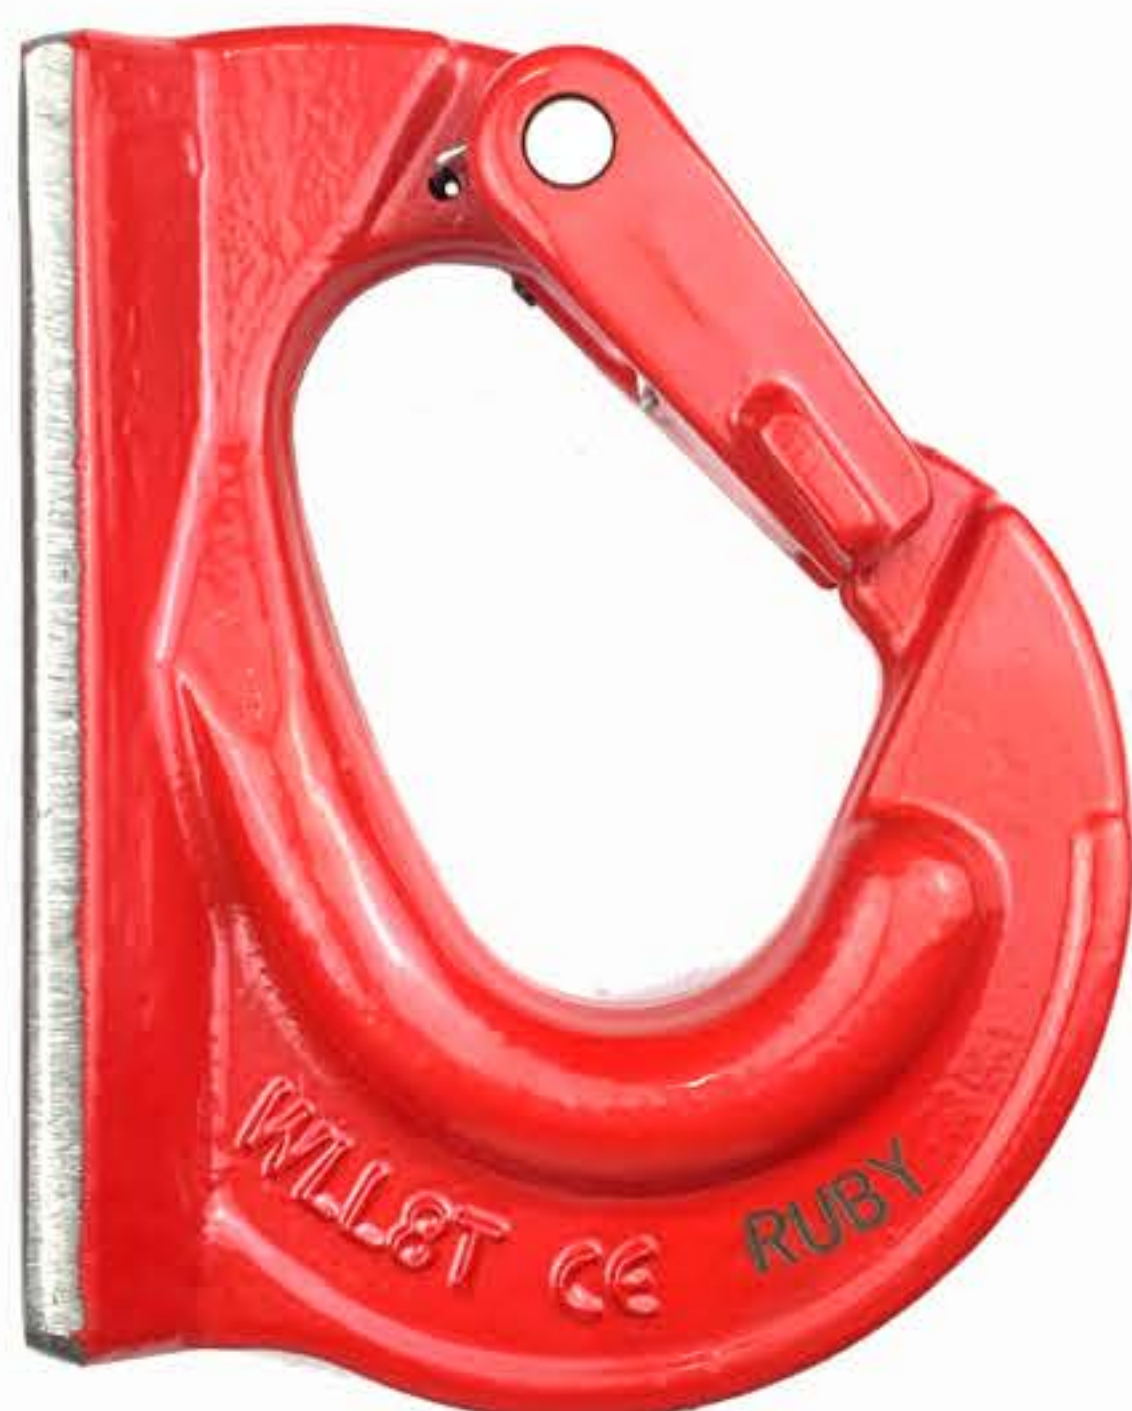

G80 WELD ON HOOK

PRODUCT CODE	WLL (T)	BL (T)	A	B	DIMENSIONS				N.W.
					C	E	H	M	
					mm				kg
RP007-1T	1	5	101.6	77.6	63	22	93	25	0.49
RP007-2T	2	10	114	92	66	26.5	81	34	0.87
RP007-3T	3	15	127	106	75	31	116	36	1.13
RP007-5T	5	25	171	133	100	36	159	43.5	2.5
RP007-8T	8	40	177	137	99	34.5	159	51	3.26
RP007-10T	10	50	224	170	140	50	194	53	5.2



* Design Factor 5:1

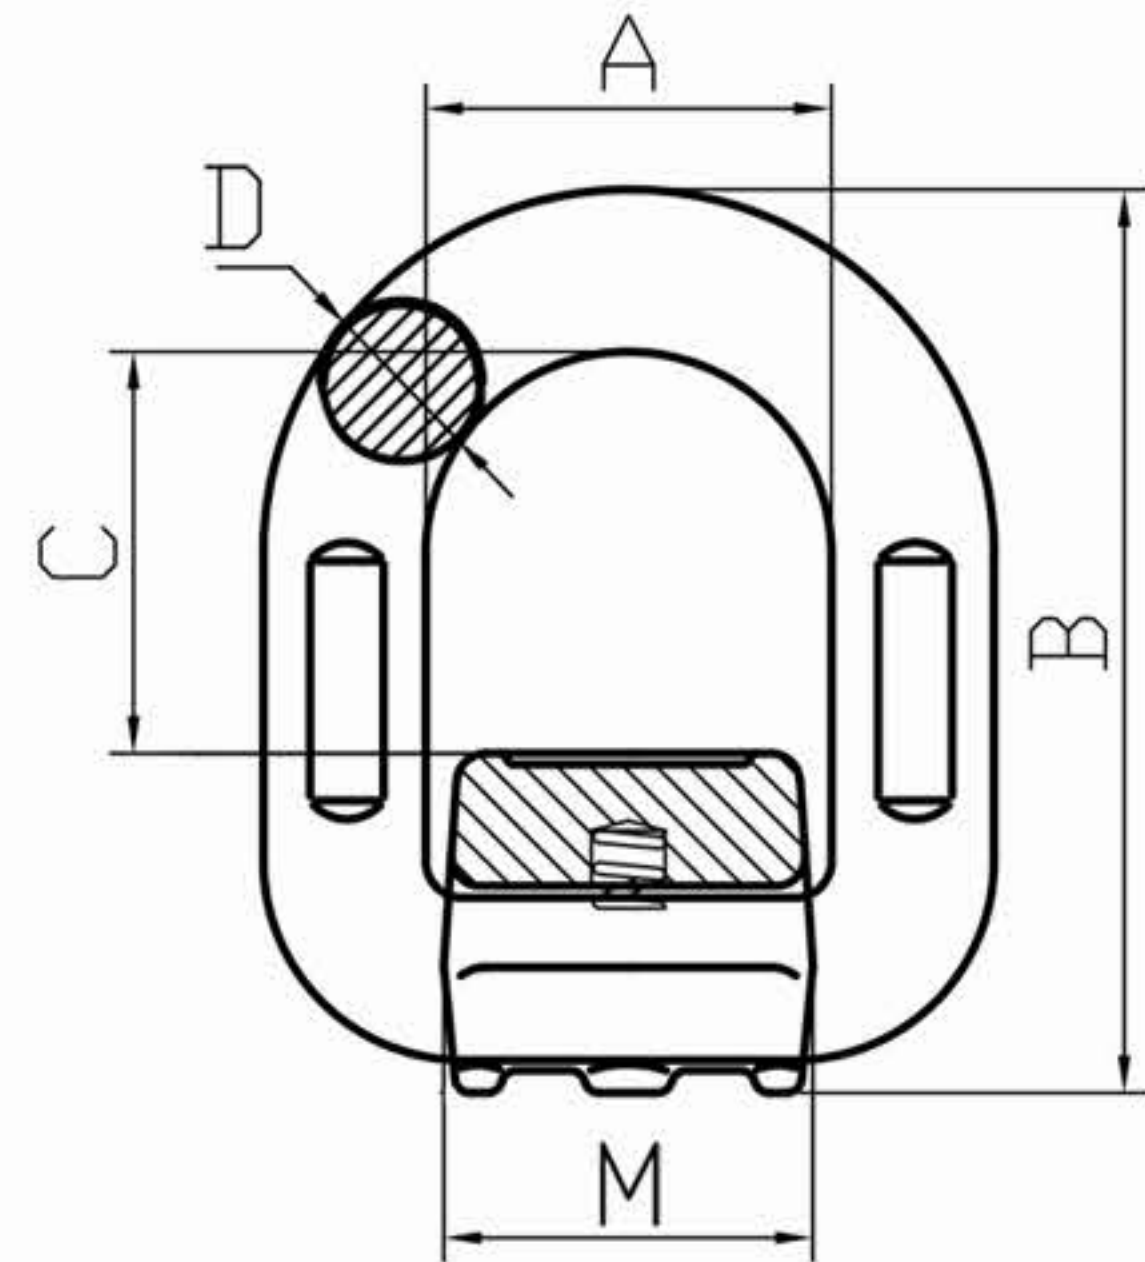

G80 WELD ON D LINK

PRODUCT CODE	WLL (T)	BL (T)	A	B	DIMENSIONS			N.W.
					C	D	M	
					mm			kg
RP008-1T	1.12	4.48	41	80	35	13	37	0.47
RP008-2T	2	8	42	90	41	14	38	0.51
RP008-3T	3.15	12.6	46	96	42	17	44	0.69
RP008-5T	5.3	21.2	55	121	48	22	50	1.46
RP008-8T	8	32	70	144	62	26.5	66	2.52
RP008-10T	10	40	85	168	78	28	78	3.59
RP008-15T	15	60	97	187	86	34	90	5.79

* Design Factor 4:1

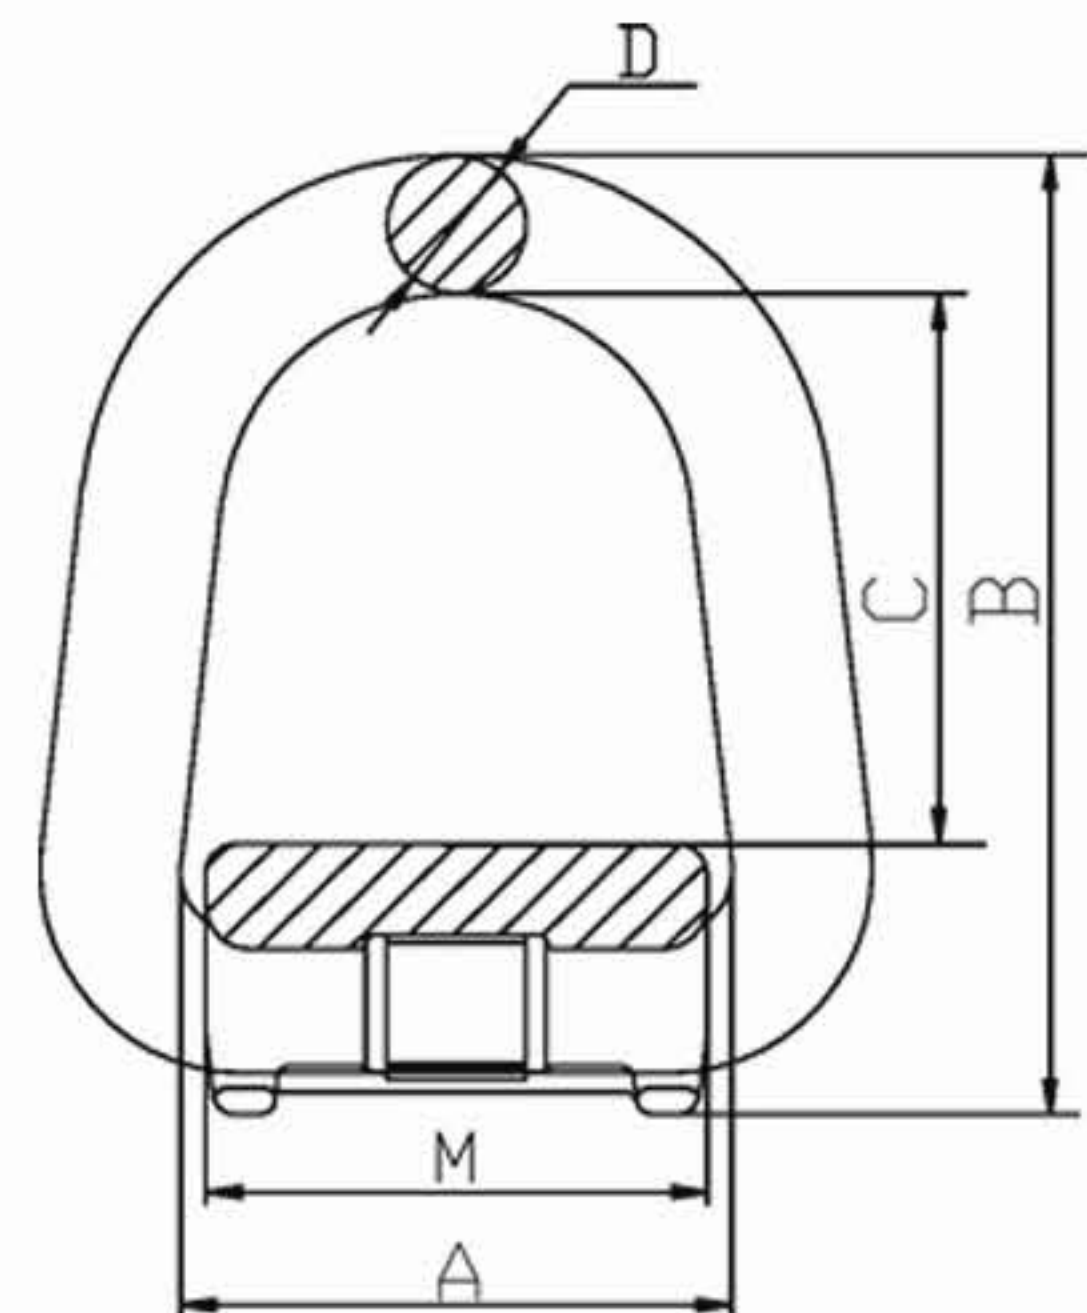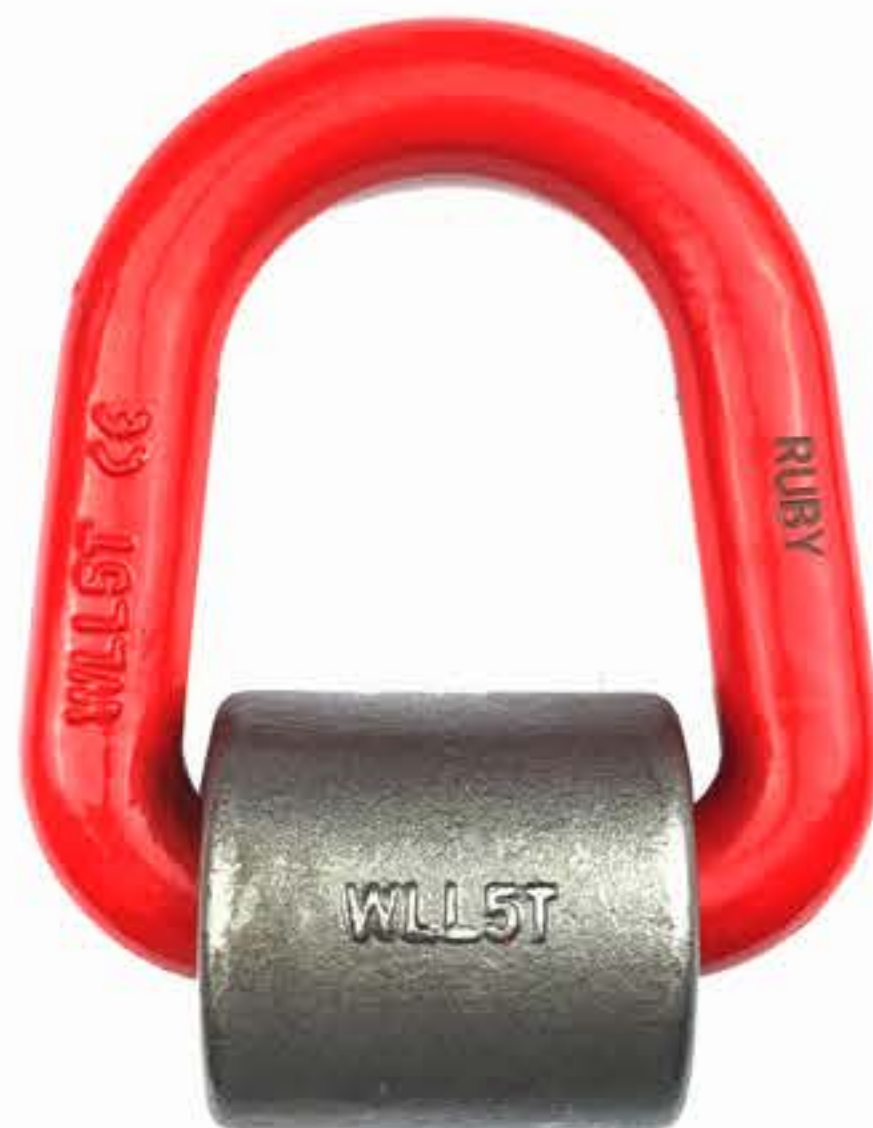

G80 WELD ON LINK

PRODUCT CODE	WLL (T)	BL (T)	A	B	DIMENSIONS			N.W.
					C	D	M	
					mm			kg
RP009-1T	1	4	55	95.7	55	14	50	0.55
RP009-3T	3	12	64	99	50	17	58	0.9
RP009-5T	5	20	75	137	74	22	64	1.8
RP009-8T	8	32	70	144	63.5	26.5	66.5	2.5

* Design Factor 4:1



HANGZHOU RUBY IMP. & EXP. CO.,LTD

TAOYUAN INDUSTRIAL PARK, PUYANG TOWN

XIAOSHAN, HANGZHOU, ZHEJIANG, CHINA

TEL:0086 (0)571 8266 3900 FAX:0086 (0)571 8263 3566

EMAIL:SALES@Z2LIFTING.COM



WWW.RUBY-LIFTING.COM